


INDIA'S #1 GENSET BRAND

Contact : 9300723311

DV SERIES GENSET

320- 1010 kVA

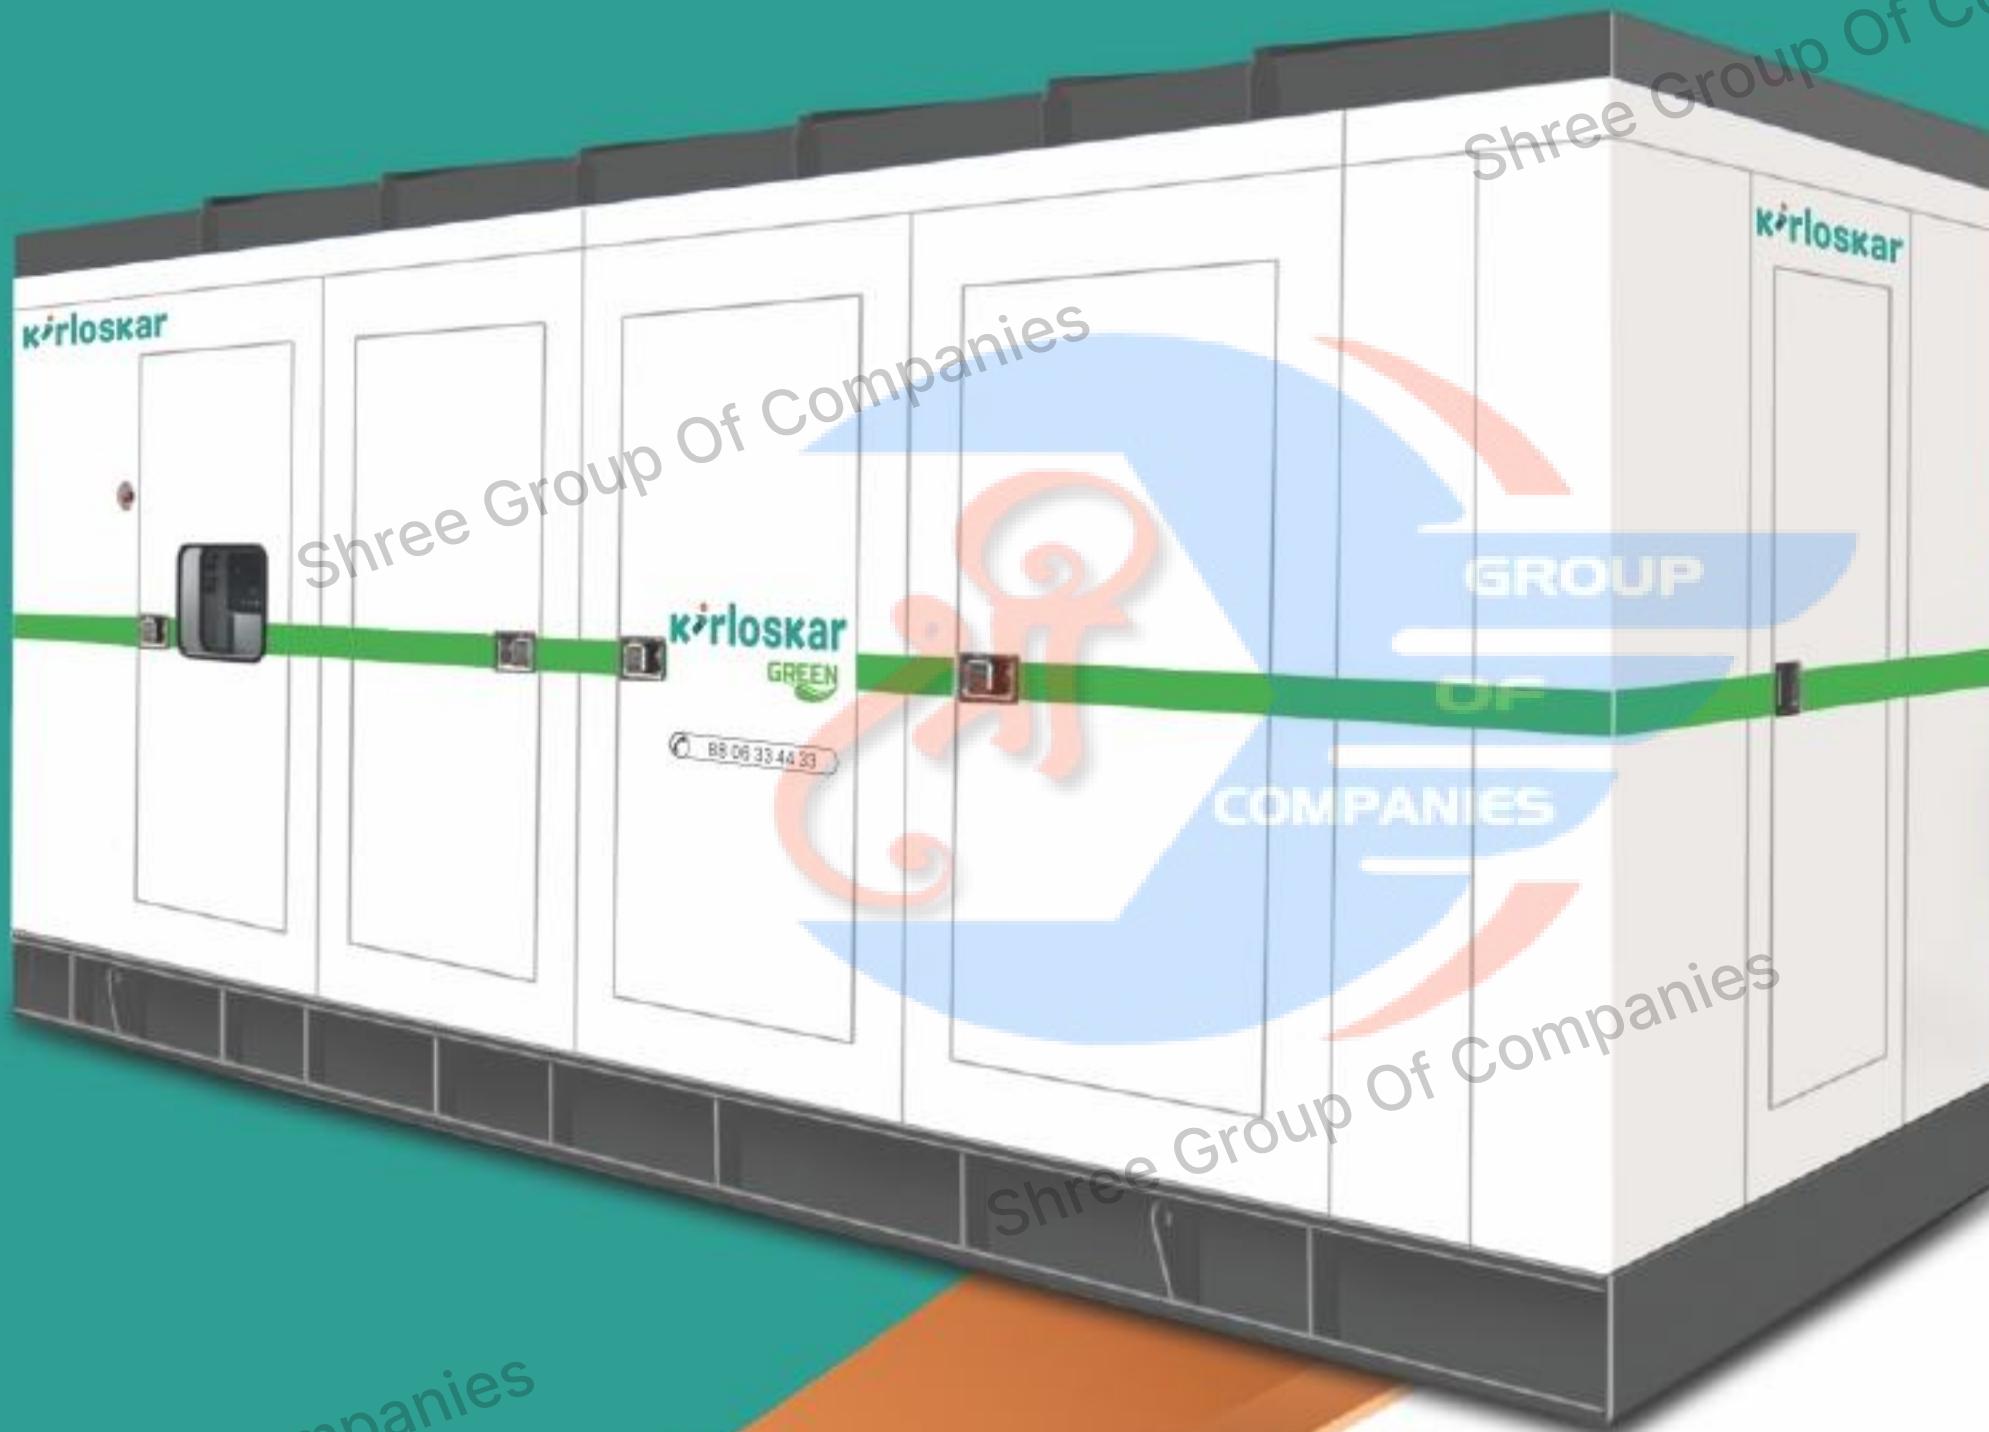

India's first IOT enabled Genset

The Complete Power Back-up Solution

EFFICIENCY HAS A NEW NAME

Kirloskar
GREEN

Prime Rating at rated rpm (as per ISO8528) ¹	KVA	320 HD	380 HD	400 HD	500 HD	600 HD	625 HD	750 HD	900 HD	1010 HD	
	kW	256	304	320	400	480	500	600	720	808	
Genset Model		KG1-320WS	KG1-380WS	KG1-400WS	KG1-500WS	KG1-600WS	KG1-625WS	KG1-750WS	KG1-900WS	KG1-1010WS	
Frequency	Hz						50				
Power factor	lagging						0.8				
Voltage	V						415 30				
Governing class (As per ISO 8528 Part-V)							G3				
DG set Noise level at 1Mtr with Genset Canopy	dBA						≤ 75			Contact KOEL for Details	
Fuel Consumption [#]	At 100 % Load		69	83.3	86.9	107.5	125.9	130.5	154	197	
	At 75 % Load	Ltrs/hr	52.5	61.2	65.1	81.9	94.2	98.6	126.4	163	
	At 50 % Load		37.6	44.1	46	57.1	63.8	66.2	89.7	120	
Fuel tank capacity	Ltrs	850	850	850	990	990	990	990	990	990	
Weight of genset with canopy (approx.) ^{\$}	Dry	Kg	5910	6000	6050	7200	7700	7800	8300	13600	
Overall dimensions of genset [^]	Length	mm	5180	5446	5650	5650	6560	6560	6800	8000	
	Width	mm	2000	2000	2000	2000	2000	2000	2300	2300	
	Height	mm	2408	2408	2408	2558	2710	2710	2713	2713	
Electrical Battery starting voltage	Volts-DC						24				
ENGINE											
Engine Model (Parent Engine)		DV8TA	DV8TA	DV8TA	DV10TA	DV12TA	DV12ETA	DV16ETA	DV16ETA		
Rated output (Prime Continuous rating as per ISO 3046)	kW	294	346	360	447	532	552	663	799	889	
	HP	400	470	490	608	723	750	901	1086	1210	
No. of cylinder	Number		8		10		12		16		
Cubic capacity ²	Ltrs		15.92		19.9		23.88		31.84		
Bore x Stroke	mm					130 x 150					
Rated Speed	RPM					1500					
Aspiration	NA/TC/TA					TA					
Lube Oil change period	hrs					500					
Lube Oil Sump Capacity	Ltrs		41		45	50		73	130	130	
Coolant Capacity with Radiator	Ltrs	55	65	65	80	100	100	175	180	180	
ALTERNATOR											
Insulation Class						GROUP	Class H				
Ingress Protection							IP 23				
Alternator Efficiency (at 100% load) 0.8 pf [*]		94.6	93.3	93.4	94.6	95.5	95	94.6	95.3	95.1	
Alternator Efficiency (at 75% load) 0.8 pf [*]		95.5	93.8	94	94.9	95.4	95.2	94.9	95.5	95.4	
Permissible Voltage Dip at Full Load 0.8 pf Lag						≤ 20 %					
Time Permitted to build up rated voltage at rated RPM		< 3 sec, provided engine should reach rated RPM					< 1 sec, provided engine should reach rated RPM				
Short Circuit Withstand Time	sec						3 Times rated current for "10 sec"				
Overload Withstand Capacity	%						10% overload for one hour once in 12 hours				

Notes¹ Tolerances Apply[#] With 0.845 Specific Gravity of diesel (5% Tolerance)^{\$} These Weight are for handling & transportation only, ±5 % tolerance apply^{*} Efficiency of Alternator as per standards IEC60034-1

For Site Conditions other than standard operating conditions consult Kirloskar Oil Engines for available prime power.

For intermediate ratings, kindly contact nearest Kirloskar office

7 Easy steps for a happy Genset Ownership

- Insist on a load-study
- Select the Genset rating as per the load-study and with sufficient margin for future load expansion
- Apply site-selection guidelines carefully
- Insist on installation in line with Kirloskar Green guidelines


- Ensure adequate size and proper connection of cables
- Understand the Genset operation & maintenance procedures during commissioning
- Follow routine maintenance protocols through authorized Kirloskar Green service dealers

Canopy

- Ease of Access and Serviceability
- Aesthetically designed, weather and sound resistant enclosure
- Insulation conforms to UL94-HF1 class for flammability

Controller

- Microprocessor based
- Graphical LCD display
- Best in class monitoring and diagnostic capability
- Integrable with AMF, synchronization & communication configurations

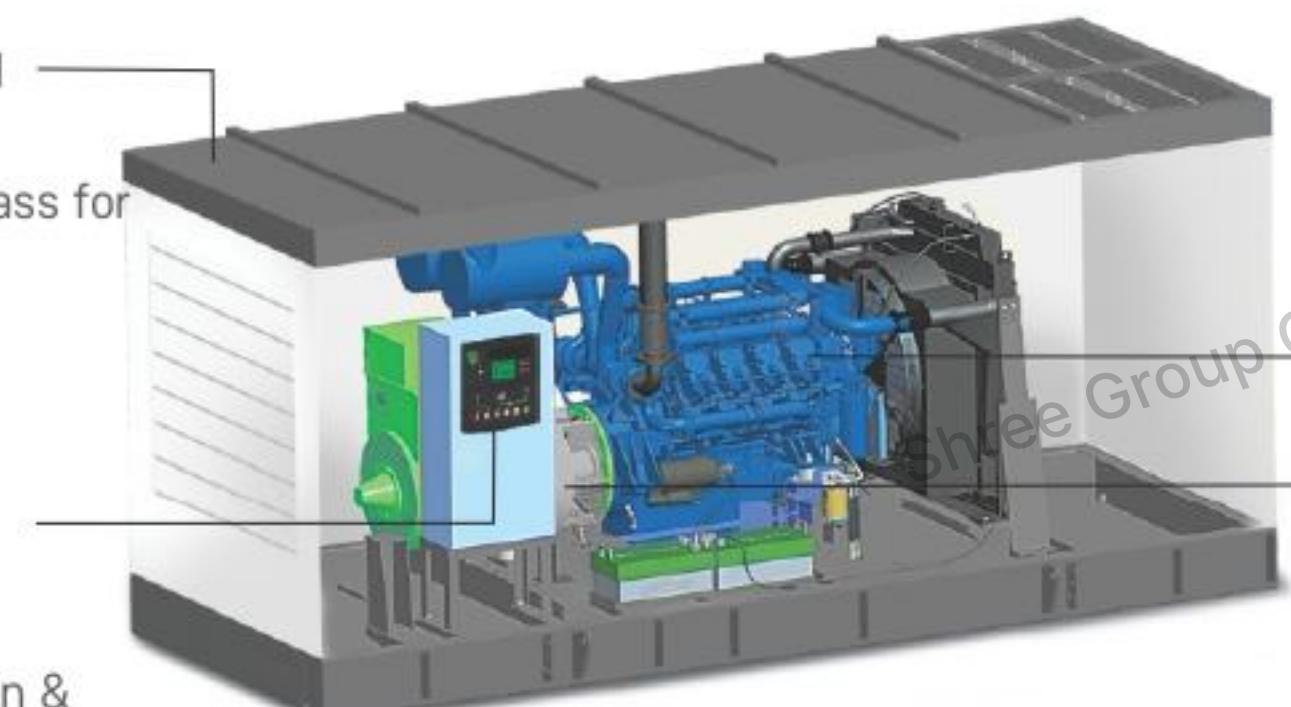**Engine**

- O2E Series: Low emission, high efficiency engines
- Compact, Robust and Rugged Design
- 500 hours lube-oil change period
- Integral set - mounted radiator system, designed & tested for 50°C ambient temperature

Alternator

- Best In Class Efficiency
- Special Windings to Reduce Harmonics
- Vacuum Pressure Impregnation and epoxy gel coating on the winding

Contact : 9300723311

Prime rating and Stand-by rating¹



'Prime power' is designed for Unlimited hours, as compared to 'Emergency stand-by' designed for 200 hours in a year. Prime rated Gensets also permit 10% temporary overloading. Users need to carefully select the Genset rating to meet their requirement. Kirloskar offers Prime power as a standard offer. Contact Kirloskar for stand-by ratings.

Engine capacity does matter²



Engine capacity (cc) plays a vital role in Genset performance. Higher engine capacity leads to a robust and stable Genset performance.

Higher engine capacity also enables the Genset to respond quickly & positively to sudden load additions.

Best-in-class Fuel Efficiency



Kirloskar Green Gensets offer a unique combination of CPCB norm compliance and enhanced fuel efficiency. Across the range, Kirloskar Green Gensets offer substantial savings in fuel cost.

O2E Series (Optimal Operating Efficiency):


Genset ratings are selected based on the present load and future expansion. Fuel efficiency of most Gensets is optimized at the full rating of the Genset.

In practice, Gensets rarely get loaded to full capacity. Power demand variations across day & night, weekdays & weekends,

summer & winter lead to an average 50-70% loading on Gensets.

Considering this practical situation, Kirloskar has extended fuel efficiency optimization from 100%, right up to 50% of rated load.

Combination of best-in-class fuel efficiency & O2E provides a double advantage.

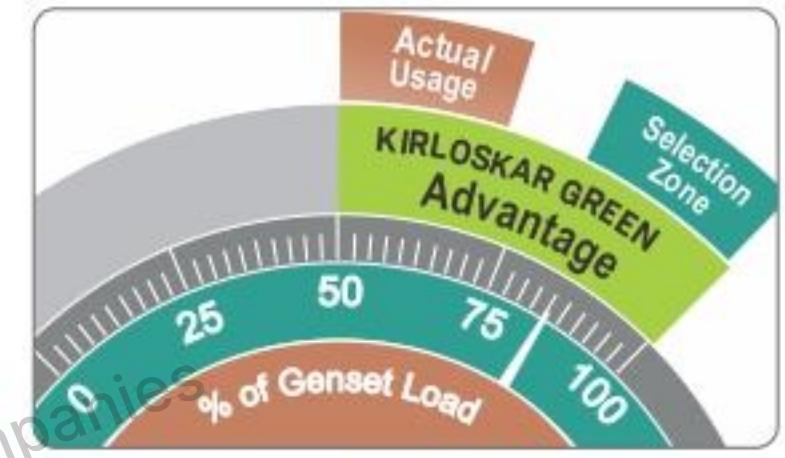

Genset Monitoring at Your Finger Tips



Kirloskar Green gensets are enabled with Kirloskar remote monitoring system which shares Real Time Genset information and location Services. It can be accessed via mobile device or desktop. Kirloskar remote monitoring system also highlights any

parameter which needs special attention. These critical indication alerts are sent to user mobile via text message. It also alerts nearest services dealer in case of any emergency break-down.



Ask your Dealer for KRM login details & password

State of the art Genset Controller



Kirloskar Green Genset put the command in your hands. Micro-processor based Genset controllers display a host of genset parameters and put all controls at your fingertips.

Monitoring Features:

- Phase Voltages & Currents, Frequency, Reverse power, Genset kVA, kW, kWh, kVAr, Power Factor, Canopy Temperature
- Lube oil Pressure, Engine Temperature, RPM, Run Hours, Number of starts, Fuel Level, Auto / Manual Stop, Battery charge condition, AMF feature

Diagnostic Features:

- Battery charging failure, Over/Under speed, Over Current, Over/Under Voltage, Over kW, Phase Seq., Phase missing, Mains Under voltage, Earth Fault trip, Fuel usage Alarm
- Low lube oil Pressure, High Engine Temperature, Low/High battery voltage, Low Fuel Level, Over Crank protection, Routine maintenance indicator, Genset Test Facility, Mains Frequency

KG745 Controller



Optional Features:

- Modbus Communication
- Synchronization

Peace-of-mind Ownership



Kirloskar Green Gensets have always been preferred for their robust design and reliability over long usage life.

Kirloskar Green range carries the confidence of well-established and proven engine platforms. For compliance to revised CPCB norms, Kirloskar has carefully selected those technologies which not only retain, but enhance Gensets durability and on-site serviceability.

Thus, Kirloskar Gensets offer you many years of trouble-free performance; backed by the assurance of prompt support. Peace-of-mind driven by product reliability and low cost of ownership.

EFFICIENCY. INTEGRATED

A KIRLOSKAR PROMISE

Efficient Products

- India's first IoT enabled digital genset
- Designed for convenient user experience
- Best-in-class fuel efficiency delivered
- Compact design & long life product
- Optimized consumption of lubricant oil
- Optimized total cost of ownership (TCO)
- All products tested before delivery

**EFFICIENT
PRODUCTS****EFFICIENT
SOLUTIONS****Efficient Solutions**

- Load sizing for every single genset order
- One stop power back-up solutions
- Serves complete application gamut
- Highly trained & experienced team
- Non-conventional solutions (bio-diesel)
- Specific solution for harsh environments
- Exhaust mgmt., foundation, cabling etc.

Efficient Service

- India's widest service dealer network
- Kirloskar connect-self-service application
- eFSR-Electronic field service report
- Over 6000 trained service engineers
- Over 600,000 machines under care
- 98%+ parts available at each outlet
- Flexible & economical AMC-Bandhan

**EFFICIENT
SERVICE****EFFICIENT
NETWORK****Efficient Network**

- Consistent, reliable & long-established
- 250+ expert touch points across India
- 500+ solution oriented professionals
- Uniform customer experience across
- Central system for enquiry to PRF
- Fair trade practices & Price transparency

Efficient Deliveries

- Cost-effective deliveries guaranteed
- Assured 7-day delivery of gensets
- Supports project management system
- Reduced working capital for customer
- Award-winning replenishment model
- Assurance of FRESH products always

**EFFICIENT
DELIVERIES****EFFICIENT
24X7 CARE****Efficient 24X7 Care**

- 24 X 7 operational customer care centre
- Team of over 70 trained & focused exec.
- Tracking every service request till closure
- Centrally maintained CRM for all requests
- Satisfaction call after every SR closure
- Central sales lead tracking system
- Continuous NPS and CDI measurement

Hospital



Hospitality



Industry



IT & ITeS



Kirloskar
Oil Engines



www.koel.kirloskar.com

Kirloskar Oil Engines Limited

A Kirloskar Group Company

Laxmanrao Kirloskar Road, Khadki,
Pune 411 003 INDIA.

88 06 33 44 33

koel.helpdesk@kirloskar.com

Contact : 9300723311

Mark bearing word 'Kirloskar' in any form as a suffix or prefix is owned by Kirloskar Proprietary L td. and Kirloskar Oil Engines Ltd. is the Permitted User.
This Catalog is copyrighted and may not be reproduced in any form not even parts of it, without previous written permission by copyright owners, Kirloskar Oil Engines L. td.
Product improvement is a continuous process. Kindly contact Kirloskar for latest information.
Images are for illustration purposes only.

Stamp of
Authorised
Representative